

930 微差壓開關 0~40mbar



特性

- * 930採可調整的差壓開關來監控超壓、真空及差壓
- * 以矽膠薄膜感應，精確度高
- * 附刻度調整，易於操作
- * 多種範圍選擇，操作精度高

應用範圍

- * 監控氣體濾器及通風機
- * 工業用通風設備
- * 空氣壓力控制
- * 監控空氣流量
- * 液位控制
- * 冷凍空調系統
- * 機械及系統工程
- * 環境工程

技術資料

壓力範圍

0~40 mbar (參考訂購編號表)

操作溫度

-20 ~ +85°C

感應元件

薄膜式

保護級數

沒有覆蓋IP 00
有覆蓋IP 54

重量

覆蓋 150g
沒有覆蓋110g

安裝位置

直立式

外罩材質

主體: PA6.6.
蓋子: PS

隔膜材質

矽膠，耐溫200°C

壓力連接

P1、P2 Ø 6.0mm

電力功率

標準版:

max. 1.0A(0.4A)/250VAC

低電壓版:

max. 0.1A(0.4A)/24VDC

電力連接

AMP平插頭，
6.3mm×0.8mm
DIN 46244

使用壽命

機械週期>10⁶次

標準/符合


CE marking according to
EC Low Voltage
Directive 73/23/EEC

訂購編號

930.8 - - - - -

壓力範圍	20 to 200 Pascal(0.2 to 2.0 mbar)	0					
	40 to 100 Pascal(0.4 to 1.0 mbar)	1					
	40 to 200 Pascal(0.4 to 2.0 mbar)	2					
	50 to 500 Pascal(0.5 to 5.0 mbar)	3					
	200 to 1000 Pascal(2.0 to 10.0 mbar)	5					
	500 to 2500 Pascal(5.0 to 25.0 mbar)	6					
	1000 to 4000 Pascal(10 to 40 mbar)	7					
接點樣式	gold-plated for low voltages, screw terminals enclosed	1					
	up to maximum 1.0 A (0.4) / 250 VAC, screw terminals enclosed	2					
	up to maximum 1.0 A (0.4) / 250 VAC with 6.3×0.8 mm flat plugs	3					
	gold-plated for low voltages with 6.3×0.8 mm flat plugs	4					
安裝方法	mounted directly without bracket	2					
調節旋鈕	scale in mbar	1					
	scale in Pascal	2					
	scale in Pascal and in WC	3					
IP 保護種類	IP 54 with cable conduit PG-11	1					
	IP 54 with cable conduit M20×1.5	2					
	IP 54 with cable conduit NPT1/2"	3					
	IP 00 without cover	4					
包裝	bulk packed, 45 pcs. per carton	1					
	bulk packed, folding boxes included	2					
	individually boxed	3					

技術圖

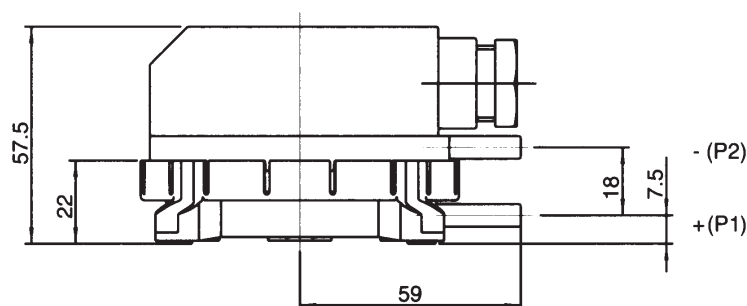

930.8x Climair®

